

HOVERAir




X1 PRO | PROMAX


PowerCase User Manual

ZEROZERO
R O B O T I C S



PA46H028_V1.0

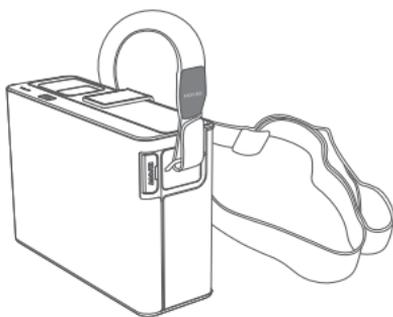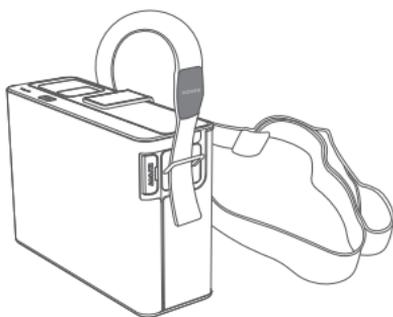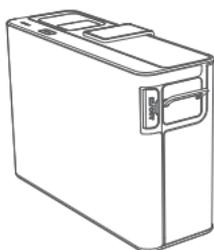

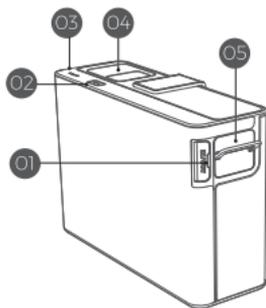


01 Charging Port C1

02 Battery Display Button

03 Battery Indicator

04 Viewing Screen

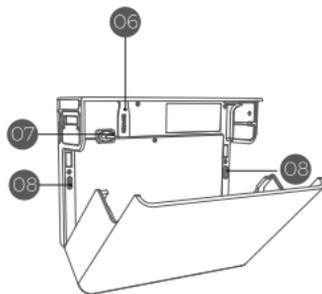

05 Hook


06 Installation Wrench

07 Charging Port C2

08 Charging Port C2 Adapter

Adapter Installation


Remove the Charging Port C2 Adapter, insert it into the HOVERAir X1 PRO/PROMAX, and place the HOVERAir X1 PRO/PROMAX into the PowerCase for charging.



Charging Port C2 Adapter




Charging Port C2 Adapter

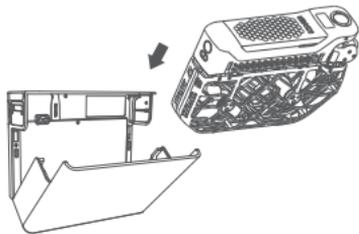


Adapter Removal

Use the Installation Wrench to remove the charging adapter from the HOVERAir X1 PRO/PROMAX.

Installation Wrench



Installation Wrench



Charging Port C2 Adapter


Charging

■ When only C1 is connected to an external power source

The external power source charges the PowerCase with a maximum power of 45W.


■ When C1 is connected to an external power source and the HOVERAir X1 PRO/PROMAX is placed in the PowerCase.

The external power source prioritizes charging the HOVERAir X1 PRO/PROMAX with a maximum power of 30W. Once the HOVERAir X1 PRO/PROMAX is fully charged, the external power source charges the PowerCase.




Discharging

- When only the HOVERAir X1 PRO/PROMAX is in the PowerCase it charges the HOVERAir X1 PRO/PROMAX with a maximum power of 36W.




- When only a phone is connected to the charging case it charges the phone with a maximum power of 45W.
- Connect your phone to the PowerCase while the HOVERAir X1 PRO/PROMAX is inside the case. The PowerCase will prioritize charging the phone (maximum 45W). Once the phone is fully charged or disconnected, it will charge the HOVERAir X1 PRO/PROMAX (maximum 36W).

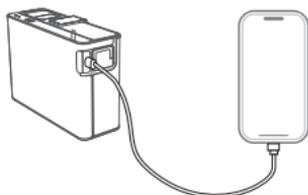

Checking Battery Level

- Short press the battery display button to show the battery level.

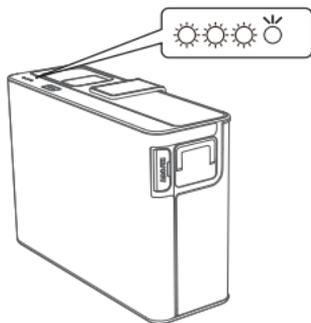

LED Indicator Light	Battery Level
☀️☀️☀️☀️	89%-100%
☀️☀️☀️🔋	76%-88%
☀️☀️☀️●	64%-75%
☀️☀️🔋●	51%-63%
☀️☀️●●	39%-50%
☀️🔋●●	26%-38%
☀️●●●	14%-25%
🔋●●●	1%-13%

Charging Indicator Light

LED Indicator Light	Battery Level
☀️☀️☀️☀️	100%
☀️☀️☀️🔋	75%-100%
☀️☀️🔋●	50%-75%
☀️🔋●●	25%-50%
🔋●●●	0%-25%

Discharging Indicator Light

LED Indicator Light	Battery Level
☀️☀️☀️☀️	75%-100%
☀️☀️●●	50%-75%
☀️●●●	25%-50%
🔋●●●	0%-5%
●●●●	0%

Product Specifications

Built-in Battery Rated Voltage:

Input: DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A

Charging Port C1 Output: DC 5V/3A, 9V/3A, 12V/3A

Charging Port C2 Output: DC 12V/2.5A

Battery Capacity: 2*6000mAh/46.2Wh

Operating Temperature: -20°C to 30°C (-4°F to 86°F)

It is recommended to use the official 65W Power Adapter to achieve the highest charging speed.

Precautions

1. When using the PowerCase to charge the HOVERAir X1 PRO/PROMAX, it is recommended to use the official 65W adapter or other PD fast chargers that meet FCC/CE specifications. It is recommended to use the official charging cable or a charging cable that supports a current of 5A or above. Using non-recommended adapters or charging cables may result in slow charging, inability to charge, and other unknown safety risks.
2. Make sure the PowerCase is placed securely and kept dry. Use it in a well-ventilated area and take care to prevent any risk of fire.
3. Do not touch the power interface or adapter with your hands or other conductors.
4. If the power interface or adapter is attached with liquid, please wipe it clean with a dry cloth while it is not powered.
5. Disassembling, piercing, impacting, crushing, short-circuiting, and burning the PowerCase are strictly prohibited.
6. Do not use the PowerCase if it has been submerged in water.
7. The PowerCase may become slightly warm during charging, which is normal. When the battery temperature is high, the PowerCase will wait for the battery to cool down before charging it.

Disclaimer

Before using the HOVERAir X1 PRO/PROMAX PowerCase, please read the User Manual carefully. Understanding and following the instructions will help prevent harm to you and others and avoid damage to the product and nearby items.

By using this product, you agree that you have read and accepted all the terms and conditions in this document. You take full responsibility for how you use this product and any outcomes. Zero Zero Technology is not responsible for any damage, injury, or legal issues from improper use of the product.

Product Name : _____ User Name : _____
Product S/N : _____ Phone Number : _____
Dealer : _____ Date of Purchase : _____
Contact Address : _____

Warranty Service Request

If you experience issues with your product during the warranty period, please follow these steps to request service:

Components	Warranty Period	Service Method
Motherboard	12 Months	Customer Mail-In
Battery	12 Months	Customer Mail-In
Cosmetic Parts	No Warranty	Customer Mail-In

The warranty period for this product begins on the date of purchase. If you cannot provide valid proof of purchase, the warranty start date will be 90 days after the manufacturing date shown on the device, or as otherwise specified by Zero Zero Technology. If the last day of the warranty period falls on a statutory holiday, the warranty will extend to the next business day.

Within the aforementioned warranty period, if Shenzhen Zero Zero Infinity Technology Co., Ltd. ('we' or 'Zero Zero Technology') confirms that performance issues are due to defects in materials or workmanship of the covered components, users are eligible for free repairs. For issues beyond the warranty period or not caused by component quality within the warranty period, users may apply for paid repair services. Zero Zero Technology will cover the return shipping costs to the user's specified location for free repairs.

The following situations are not covered by the free warranty:

- Faults or damage caused by transportation or handling after purchase;
- Any modifications, disassembly, or repairs not authorized by Zero Zero Technology;
- Damage caused by accidental factors or human actions, such as liquid ingress, drops, incorrect voltage input, excessive pressure, motherboard deformation, etc.;
- Faults or damage caused by improper installation, use, maintenance, or storage not in accordance with the user manual;
- Inability to provide valid proof of purchase or receipt, or if the documents have been forged or altered;
- Labels, serial numbers, or waterproof and tamper-evident marks that have been torn, altered, or are illegible;
- Faults or damage caused by force majeure (e.g., fire, earthquake, flood, etc.);
- Accidents such as collisions, burns, or loss of the product caused by non-quality-related human factors;
- Damage caused by continued use of the product when components are aged or damaged;
- Damage caused by reliability and compatibility issues when using non-Zero Zero Technology certified third-party components;
- Signs of tampering or alteration on the machine serial number, factory labels, and other markings;
- Failure to send the relevant items within 7 calendar days after contacting Zero Zero Technology for warranty service confirmation;
- Other performance issues not caused by product quality problems.

Additional Information

- If the user provides an incorrect delivery address or if the recipient refuses to accept the package, the user is responsible for any resulting losses.
- Water damage can severely affect product performance and may render the product irreparable. Zero Zero Technology may, at its discretion, offer a replacement service.
- Before sending the product for repair, please remove any personalized items or decorations (including but not limited to decorative stickers, UAS stickers, paint, etc.). Zero Zero Technology is not responsible for damage or loss of these personalized items or decorations.
- To protect your rights, please inspect the product for any damage (including shipping damage) upon receipt. If you find any issues, please notify us within 7 days of receiving the product. Otherwise, it will be assumed that you have received the product in good condition and working order.
- Any components replaced during repair (including paid repairs) will be retained and owned by Zero Zero Technology.
- For products beyond the warranty period or free repair service scope, Zero Zero Technology will provide a quote based on the specific situation. Please pay the corresponding fees for any chargeable services. If you refuse to pay, Zero Zero Technology reserves the right to suspend services until the fees are settled. You will be responsible for any consequences resulting from such suspension.